


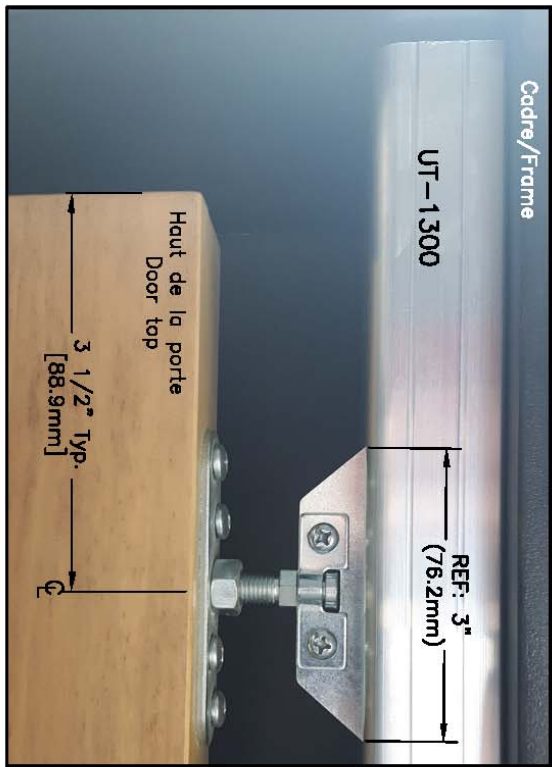


Fiche technique UT-1300 / Technical sheet UT-1300

Application	Résidentielle, Institutionnelle et Commerciale Residential, Institutional and Commercial
Usage	Léger — Light duty

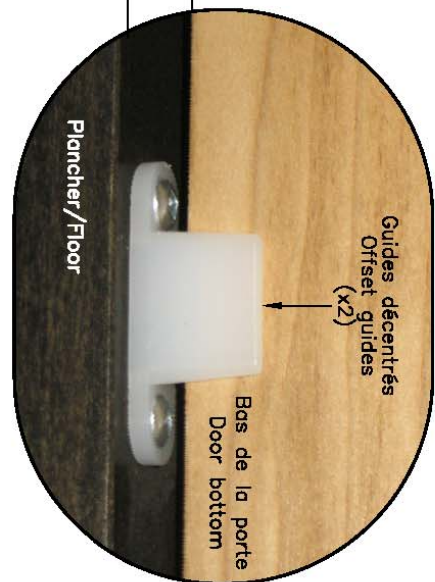

HAUTEUR DE L'OUVERTURE: ROUGH OPENING HEIGHT:
HAUTEUR DE PORTE/DOOR HEIGHT +2 9/16" [+64.3mm] MIN. +3 7/16" [+86.5mm] MAX.

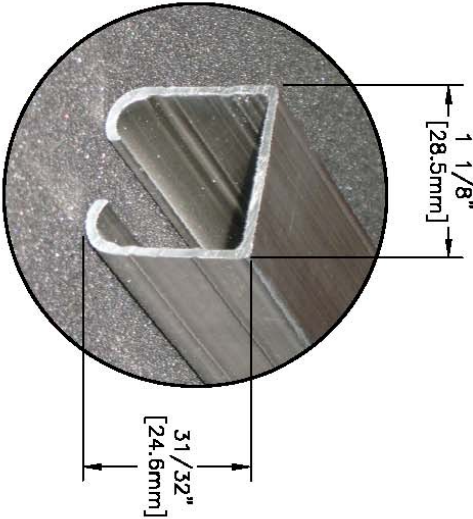

Pour porte/For door 3/4" à/co 1 3/4"
de/of 75 Livres/Pounds (34kg) Max.








UNIQUE Architectural
Votre satisfaction, notre fierté!


UNITRACK Systèmes
UT-1300 Systems

Tél.: 514 351-5454 / Fax: 514 351-5554
uniqueproduit@architectural.com



Dessin de référence drawing
ISSUE / NUMÉRO: REF-UT1300 DATE: 20/09/2016 PAGE: 1/1

CE DESSIN EST LA PROPRIÉTÉ DE PRODUITS ARCHITECTURAX; UNIQUE INC. TOUTE REPRODUCTION EST STRICTEMENT INTERDITE SANS CONSENTEMENT ÉCRIT.
THIS DRAWING IS THE PROPERTY OF UNIQUE ARCHITECTURAL PRODUCTS INC. ANY REPRODUCTION WITHOUT WRITTEN CONSENT IS STRICTLY PROHIBITED.

Liste des pièces ensemble UT-1300 / Parts list for UT-1300 series		
Nom/Name	Image/Picture	Qte/Qty
Rail UT-1300 Track		1
Chariot / Hanger UT-1350		2
Plaque de fixation Fixing plate		2
Guide décentré UT-1050 Offset guide UT-1050		2
Écrou hexagonal 5/16" HEX nut		2
Vis / Screw #10x1-1/4"		8
Vis / Screw #8x3/4"		10

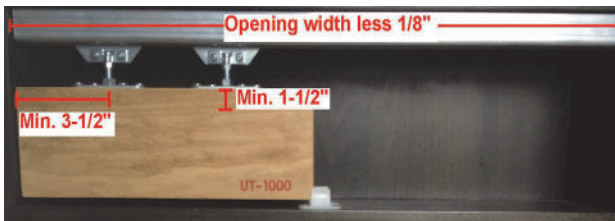

1-Cut rail 1/8" LESS than the TOTAL opening width.

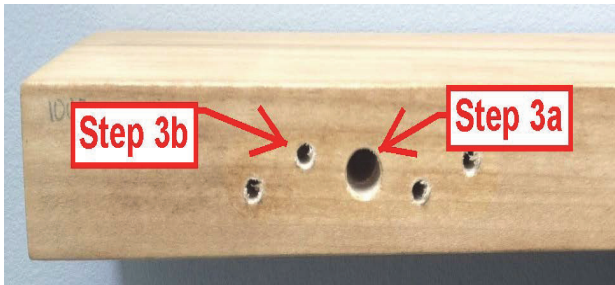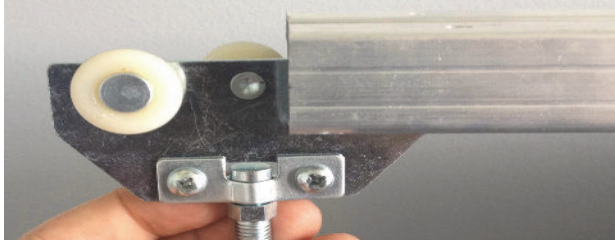


3a: Drill a 3/8" diameter hole at least 1-1/2" deep, at 3-1/2" from each end of the door.


3b: Drill 1/8" diameter holes 1" deep for the fixing plate screws.




5-Screw on the fixing plates using #10 x 1-1/4" screws.

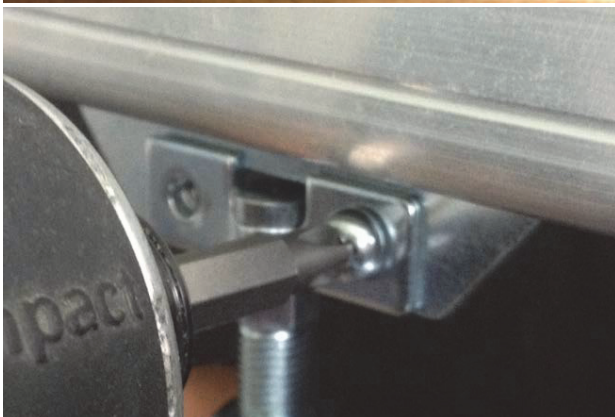

6-Unscrew the attachment plates for the fastening bolt.

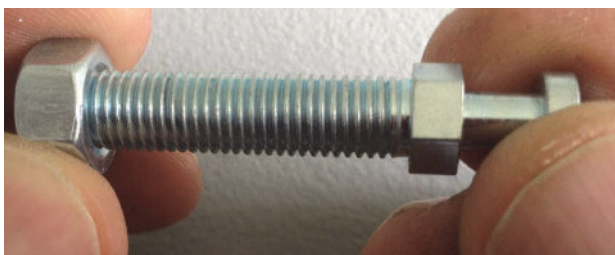


7-Screw the 5/16" hex nut onto the bolt.

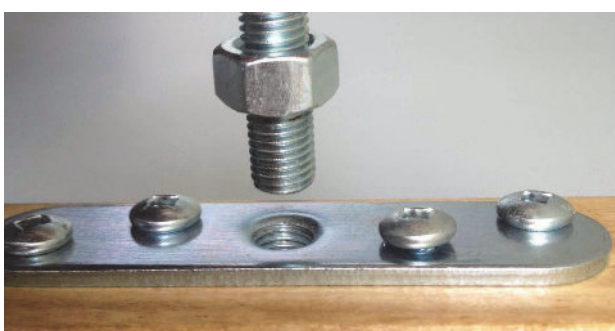


8-Screw the fastening bolt into the fixing plate.



9-Position the door under the hangers and insert the fastening bolts into the attachment sleeves.

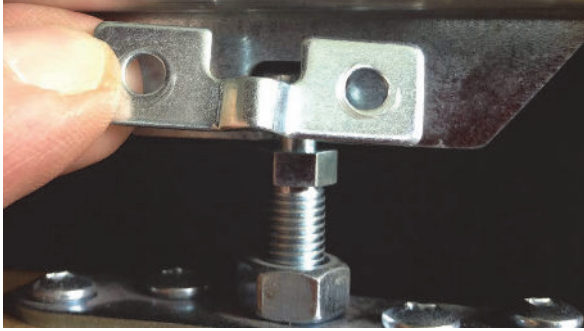

10-Re-fasten the attachment plates removed in step 6. DO NOT OVER-TIGHTEN.

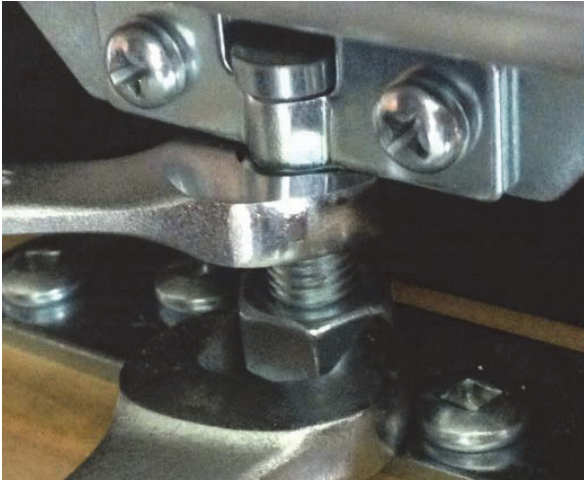

11-Set the door level and adjust its height by screwing or unscrewing the hex part of the bolt. Once adjustment is made, lock the bolt by tightening the 5/16" hex nut.










12-Place the guides UT-1050 on the floor, on both sides of the door and screw into place using #8 x 3/4" screws.

HAUTEUR DE L'OUVERTURE:
ROUGH OPENING HEIGHT:

HAUTEUR DE PORTE/DOOR HEIGHT
+2 9/16" [+64.3mm] MIN.
+3 7/16" [+86.5mm] MAX.

Parts list for UT-1300 series

Name	Picture	Qty
UT-1300 Track		1
Hanger UT-1350		2
Fixing plate		2
Offset guide UT-1050		2
5/16" HEX nut		2
Screw #10x1-1/4"		8
Screw #8x3/4"		10