
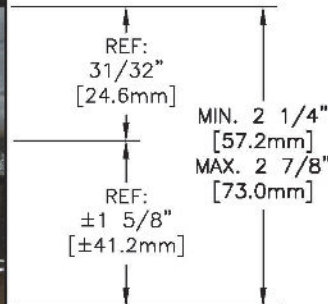


Fiche technique UT-1340 / Technical sheet UT-1340

Application	Résidentielle, Institutionnelle et Commerciale Residential, Institutional and Commercial
Usage	Léger —Light duty
Norme / Standard	Conforme—Complies with ANSI/BHMA A156.14 Grade 1


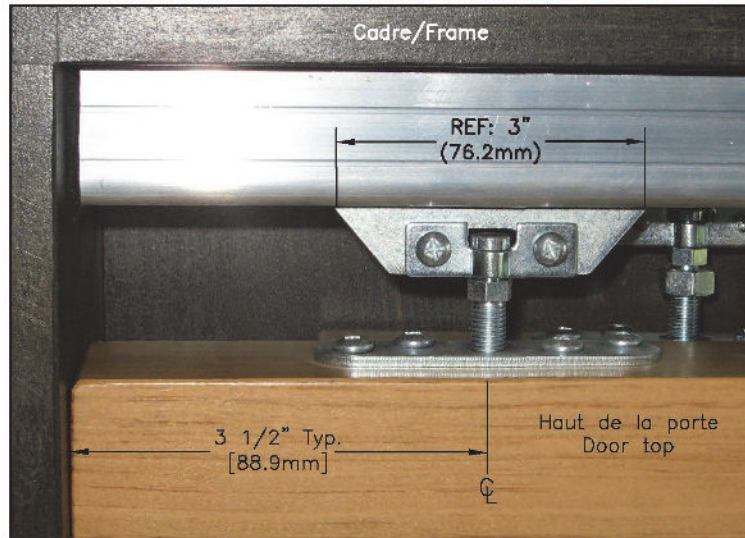


**HAUTEUR DE L'OUVERTURE:
ROUGH OPENING HEIGHT:**

HAUTEUR DE PORTE/DOOR HEIGHT
+2 7/16" [+62mm] MIN.
+3 1/2" [+89mm] MAX.

Guide auto-alignant centré
Self-aligning center guide

Guides auto-alignant décentrés
Self-aligning offset guides
(x2)

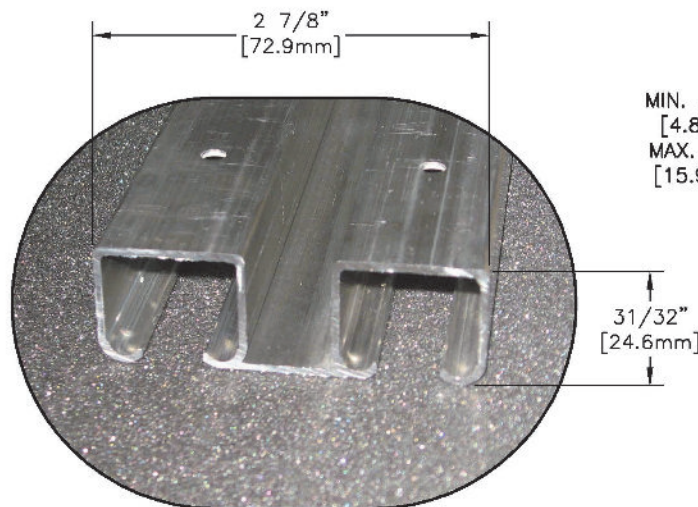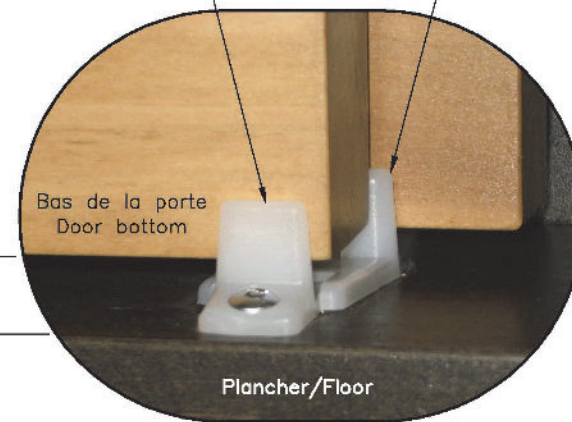

UT-1340

Pour 2 portes/For 2 doors 1 3/8"
de/of 75 Livres/Pounds (34Kg) Max.

Architectural
UNIQUE

Votre satisfaction, notre fierté!









Tél.: 514 351-5454 / Fax : 514 351-5554
uniqueproduitarchitectural.com


Systèmes
UNITRACK
Systems

UT-1340


Dessin de référence drawing

DESSIN / DRAWING No:	DATE:	PAGE:
REF-UT1340	27/08/2014	1/1


Liste des pièces ensemble UT-1340 / Parts list for UT-1340 series		
Nom/Name	Image/Picture	Qte/Qty
Rail UT-1340 Track		1
Chariot / Hanger UT-1350		4
Plaque de fixation Fixing plate		4
Guide auto-alignant décentré UT-3055 Offset self-aligning guide UT-3055		2
Guide auto-alignant centré UT-3050 Center self-aligning guide UT-3050		1
Écrou hexagonal 5/16" HEX nut		4
Vis / Screw #10x1-1/4"		16
Vis / Screw #8x3/4"		15

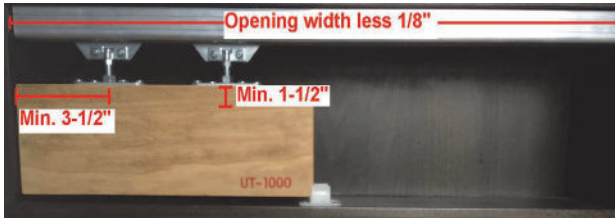

1-Cut rail 1/8" LESS than the TOTAL opening width.

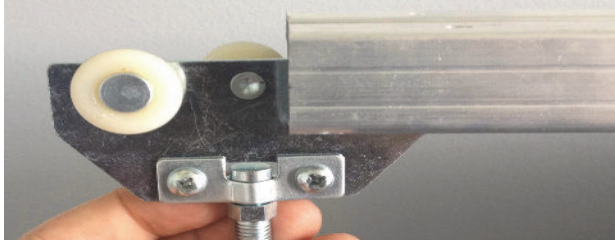

2-Slide hangers UT-1350 into rail, making sure screw heads are all on the front (same) side and screw the rail into the opening's header.

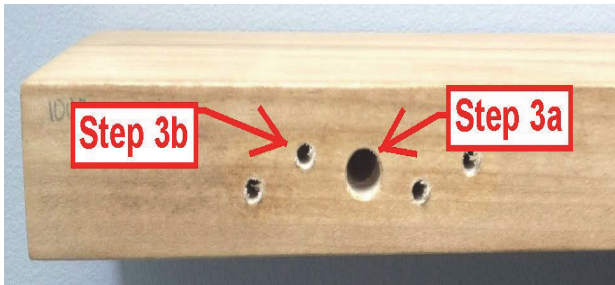


3a: Drill a 3/8" diameter hole at least 1-1/2" deep, at 3-1/2" from each end of the door.


3b: Drill 1/8" diameter holes 1" deep for the fixing plate screws.




4-Centre the fixing plate, flat side up, over the pre-drilled hole.

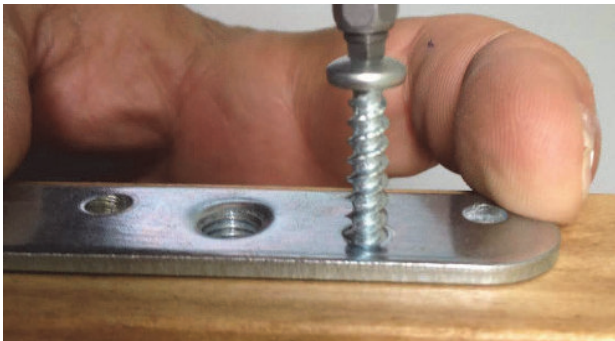


5-Screw on the fixing plates using #10 x 1-1/4" screws.

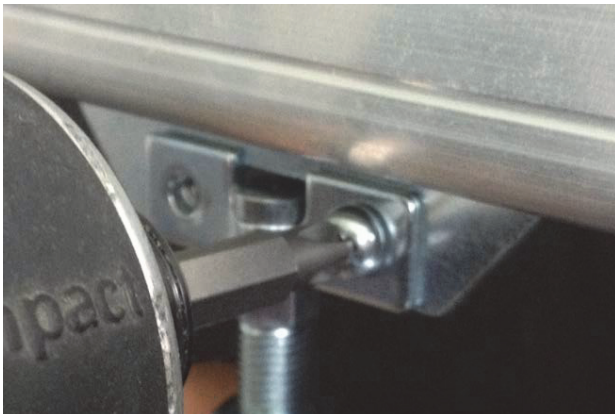

6-Unscrew the attachment plates for the fastening bolt.

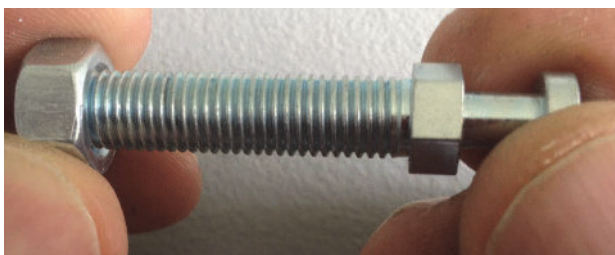


7-Screw the 5/16" hex nut onto the bolt.

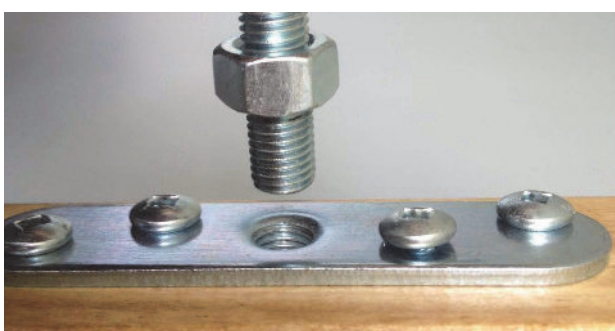


8-Screw the fastening bolt into the fixing plate.



9-Position the door under the hangers and insert the fastening bolts into the attachment sleeves.

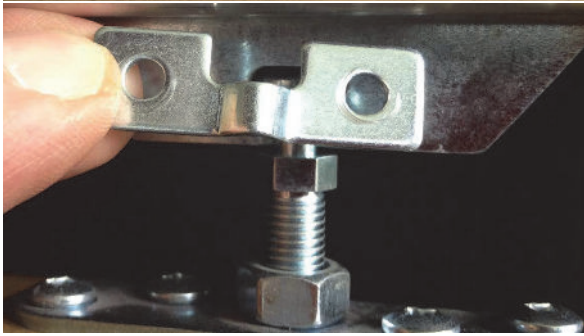

10-Re-fasten the attachment plates removed in step 6. DO NOT OVER-TIGHTEN.

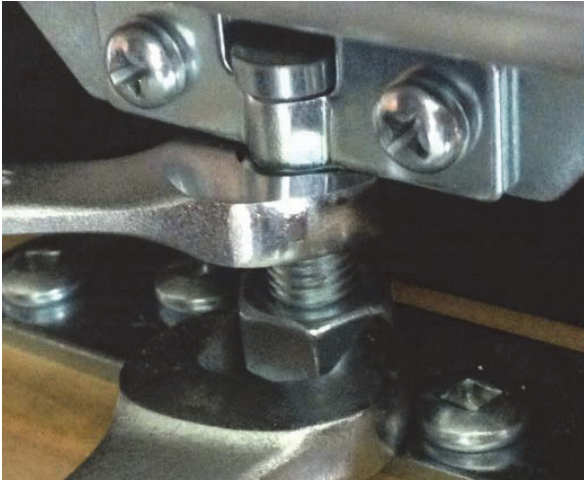









11-Set the door level and adjust its height by screwing or unscrewing the hex part of the bolt. Once adjustment is made, lock the bolt by tightening the 5/16" hex nut.



12-Place the guides UT-3055 on the floor, on the outer sides of both doors and the guide UT-3050 between the doors. Screw into place using #8 x 3/4" screws.

<p>HAUTEUR DE L'OUVERTURE: ROUGH OPENING HEIGHT:</p>
<p>HAUTEUR DE PORTE/DOOR HEIGHT +2 7/16" [+62mm] MIN. +3 1/2" [+89mm] MAX.</p>

Parts list for UT-1340 series		
Name	Picture	Qty
UT-1340 Track		1
Hanger UT-1350		4
Fixing plate		4
Offset guide UT-3055		2
Center guide UT-3050		1
5/16" HEX nut		4
Screw #10x1-1/4"		16
Screw #8x3/4"		15